

Selection Guide for Automated Logic NSB Analog Sensors



TEMPERATURE



HUMIDITY



PRESSURE



AIR QUALITY



ACCESSORIES

All products available wherever you purchase your Automated Logic products



TABLE OF CONTENTS


PRODUCTS	PAGE
Duct Temperature Sensors	
Duct Temperature Sensor	3-4
Flexible and Rigid Averaging Temperature Sensors	
Flexible Averaging Temperature Sensor	4-5
Rigid Averaging Temperature Sensor	6
Immersion Temperature Sensors	
Immersion Temperature Sensor and Thermowell	6-7
Outside Air Temperature Sensors	
Outside Air Temperature Sensor	7
Clamp-On and Strap Temperature Sensors	
Clamp-On and Strap Temperature Sensor	7-9
Remote Probe Temperature Sensors	
Remote Probe Temperature Sensors with Plenum-Rated or FEP-Jacketed Cable	9
Thermobuffer Temperature Sensors	
Thermobuffer Temperature Sensor for Freezers and Coolers	10
Wall Plate Temperature Sensors	
Wall Plate Temperature Sensor	10
Low Profile "Button" Temperature Sensors	
Low Profile "Button" Temperature Sensor	10
Room Analog ZS2 Temperature Sensors	
Room Analog ZS2 Temperature Sensors	11
Duct and Outside Air Temp/Humidity Sensors	
Duct Temp/Humidity Sensor	11
Outside Air Temp/Humidity Sensor	11
Differential Air Pressure Sensors and Switches	
ZPM Differential Air Pressure Sensor	12
EZ Differential Air Pressure Sensor	12
Differential Air Pressure Switch in a BAPI-Box	12
Pickup Ports and Pressure Tubes	
Pickup Ports and Pressure Tubes	13-14
Air Quality Sensors	
Carbon Dioxide (CO ₂) Duct and Rough Service Sensors	15
Carbon Monoxide (CO) Duct and Rough Service Sensors and Replacement Modules	15-16
Nitrogen Dioxide (NO ₂) Duct and Rough Service Sensors and Replacement Modules	16
Water Leak and Refrigerant Leak Detectors	
Water Leak Detector	17
Refrigerant Leak Detector	17
Accessories for HVAC/R	
Voltage Converter (350mA) with Adjustable 5 to 24 VDC Output	18
Thermostat Guard	18
Adaptor Plate for Retrofits	18
Foamback Insulator for Room Units	19
Flexible Probe Bracket	19
Pierceable Knockout Plugs for Open Enclosure Port	19
Output Terminal Boards and Relay Packs	
OUT64A, OUT66, UIUO4 Output Terminal Boards	20
UO4R Output Relay Board and Relay Pack for the ZN551 Controller	20



	Duct Temp Sensor with a BAPI-Box 2 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Stainless Steel Duct Probe, 1/4" (6.3mm) Diameter • BAPI-Box 2 Enclosure (IP66, NEMA 4X) Datasheet pdf	
	4" (100mm) Probe	NSB-10K-2-D-4-BB2-A
	8" (200mm) Probe	NSB-10K-2-D-8-BB2-A
	12" (300mm) Probe	NSB-10K-2-D-12-BB2-A
	18" (450mm) Probe	NSB-10K-2-D-18-BB2-A
	Duct Temp Sensor with a BAPI-Box 4 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Stainless Steel Duct Probe, 1/4" (6.3mm) Diameter • Polycarbonate and Nylon BAPI-Box 4 Enclosure (IP10 or IP44 with knockout plug in open port) Datasheet pdf	
	4" (100mm) Probe	NSB-10K-2-D-4-BB4-A
	8" (200mm) Probe	NSB-10K-2-D-8-BB4-A
	12" (300mm) Probe	NSB-10K-2-D-12-BB4-A
	18" (450mm) Probe	NSB-10K-2-D-18-BB4-A
	Duct Temp Sensor with No Box <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Stainless Steel Duct Probe, 1/4" D (6.3mm) Diameter • Plastic No Box Mounting Bracket Datasheet pdf	
	4" (100mm) Probe, 5' (1.5m) Leads	NSB-10K-2-D-4-NB-5-A
	4" (100mm) Probe, 10' (3m) Leads	NSB-10K-2-D-4-NB-10-A
	4" (100mm) Probe, 15' (4.5m) Leads	NSB-10K-2-D-4-NB-15-A
	8" (200mm) Probe, 10' (3m) Leads	NSB-10K-2-D-8-NB-10-A
	12" (300mm) Probe, 10' (3m) Leads	NSB-10K-2-D-12-NB-10-A
	18" (450mm) Probe, 10' (3m) Leads	NSB-10K-2-D-18-NB-10-A



DUCT TEMPERATURE SENSORS



	Duct Temp Sensor with a Junction Box Enclosure <ul style="list-style-type: none"> • 10K-2 or 50K Thermistor Sensor • Stainless Steel Duct Probe, 1/4" (6.3mm) Diameter • Metal Junction Box Enclosure Datasheet pdf	
	4" (100mm) Probe, 10K-2 Thermistor	NSB-10K-2-D-4-A
	8" (200mm) Probe, 10K-2 Thermistor	NSB-10K-2-D-8-A
	12" (300mm) Probe, 10K-2 Thermistor	NSB-10K-2-D-12-A
	18" (450mm) Probe, 10K-2 Thermistor	NSB-10K-2-D-18-A
	4" (100mm) Probe, 50K Thermistor	NSB-50K-D-4-A

DUCT AVERAGING TEMPERATURE SENSORS



	Duct Averaging Temp Sensor with a BAPI-Box 2 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Bendable Aluminum Probe, 3/16" (4.8mm) Diameter • BAPI-Box 2 Enclosure (IP66, NEMA 4X) Datasheet pdf	
	8' (2.4m) Probe	NSB-10K-2-A-8-BB2-A
	12' (3.7m) Probe	NSB-10K-2-A-12-BB2-A
	24' (7.3m) Probe	NSB-10K-2-A-24-BB2-A
	Duct Averaging Temp Sensor with a BAPI-Box 4 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Bendable Aluminum Probe, 3/16" (4.8mm) Diameter • Polycarbonate and Nylon BAPI-Box 4 Enclosure (IP10 or IP44 with knockout plug in open port) Datasheet pdf	
	8' (2.4m) Probe	NSB-10K-2-A-8-BB4-A
	12' (3.7m) Probe	NSB-10K-2-A-12-BB4-A
	24' (7.3m) Probe	NSB-10K-2-A-24-BB4-A

DUCT AVERAGING TEMPERATURE SENSORS







	Duct Averaging Temp Sensor with a Junction Box Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Bendable Aluminum Probe, 3/16" (4.8mm) Diameter • Metal Junction Box Enclosure Datasheet pdf	
	8' (2.4m) Probe	NSB-10K-2-A-8-A
	12' (3.7m) Probe	NSB-10K-2-A-12-A
	24' (7.3m) Probe	NSB-10K-2-A-24-A

RIGID AVERAGING TEMPERATURE SENSORS




	Rigid Averaging Temp Sensor with a BAPI-Box 4 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Stainless Steel Averaging Probe, 1/4" (6.3mm) Diameter • Polycarbonate and Nylon BAPI-Box 4 Enclosure (IP10 or IP44 with knockout plug in open port) 	
	12" (300mm) Probe	NSB-10K-2-RA-12-BB4-A
	24" (600mm) Probe	NSB-10K-2-RA-24-BB4-A
	36" (900mm) Probe	NSB-10K-2-RA-36-BB4-A
	48" (1.2m) Probe	NSB-10K-2-RA-48-BB4-A



	Immersion Temp Sensor with a BAPI-Box 2 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Stainless Steel Immersion Probe, 1/4" (6.3mm) Diameter • Nylon Threads • BAPI-Box 2 Enclosure (IP66, NEMA 4X) Datasheet pdf	
	2" (50mm) Probe	NSB-10K-2-I-2-BB2-A
	4" (100mm) Probe	NSB-10K-2-I-4-BB2-A
	8" (200mm) Probe	NSB-10K-2-I-8-BB2-A
	Immersion Temp Sensor and Thermowell with a BAPI-Box 2 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Stainless Steel Immersion Probe, 1/4" (6.3mm) Diameter • Nylon Threads and Matching M304 Stainless Steel Thermowell • BAPI-Box 2 Enclosure (IP66, NEMA 4X) Datasheet pdf	
	2" (50mm) Probe & Thermowell	NSB-10K-2-I-2-BB2-M304-A
	4" (100mm) Probe & Thermowell	NSB-10K-2-I-4-BB2-M304-A
	Immersion Temp Sensor with a BAPI-Box 4 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Stainless Steel Immersion Probe, 1/4" (6.3mm) Diameter • Nylon Threads • Polycarbonate and Nylon BAPI-Box 4 Enclosure (IP10 or IP44 with knockout plug in open port) Datasheet pdf	
	2" (50mm) Probe	NSB-10K-2-I-2-BB4-A
	4" (100mm) Probe	NSB-10K-2-I-4-BB4-A
	8" (200mm) Probe	NSB-10K-2-I-8-BB4-A
	Immersion Temp Sensor with a Junction Box Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Stainless Steel Immersion Probe, 1/4" (6.3mm) Diameter • Nylon Threads • Metal Junction Box Enclosure Datasheet pdf	
	2" (50mm) Probe	NSB-10K-2-I-2-A
	4" (100mm) Probe	NSB-10K-2-I-4-A
	8" (200mm) Probe	NSB-10K-2-I-8-A


IMMERSION TEMPERATURE SENSORS



	Immersion Temp Sensor and Thermowell with a Junction Box Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Stainless Steel Immersion Probe, 1/4" (6.3mm) Diameter • Nylon Threads and Matching M304 Stainless Steel Thermowell • Metal Junction Box Enclosure Datasheet pdf	
	2" (50mm) Probe & Thermowell	NSB-10K-2-I-2-M304-A
	4" (100mm) Probe & Thermowell	NSB-10K-2-I-4-M304-A
	8" (200mm) Probe & Thermowell	NSB-10K-2-I-8-M304-A


OUTSIDE AIR TEMPERATURE SENSOR



	Outside Air Temperature Sensor with a BAPI-Box 2 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Well-Vented Sensor Guard • BAPI-Box 2 Enclosure (IP66, NEMA 4X) 	
	Outside Air Temp Sensor	NSB-10K-2-O-BB2-A



CLAMP-ON TEMPERATURE SENSORS

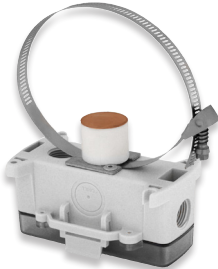

	Clamp-On Strap Temperature Sensor with a BAPI-Box 2 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • For Pipes from 2 to 4.5" (50 to 114mm) in Diameter • BAPI-Box 2 Enclosure (IP66, NEMA 4X) Datasheet pdf	
	Clamp-On Strap Sensor, 10K-2 Thermistor	NSB-10K-2-S-BB2-A



CLAMP-ON TEMPERATURE SENSORS



	Clamp-On Strap Temperature Sensor with a BAPI-Box 4 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • For Pipes from 2 to 4.5" (50 to 114mm) in Diameter • Polycarbonate and Nylon BAPI-Box 4 Enclosure (IP10 or IP44 with knockout plug in open port) Datasheet pdf	
	Clamp-On Strap Sensor	NSB-10K-2-S-BB4-A
	Clamp-On Strap Temperature Sensor with a Junction Box Enclosure <ul style="list-style-type: none"> • 10K-2 or 50K Thermistor Sensor • For Pipes from 2 to 4.5" (50 to 114mm) in Diameter • Metal Junction Box Enclosure Datasheet pdf	
	Clamp-On Strap Sensor, 10K-2 Thermistor	NSB-10K-2-S-A
	Clamp-On Strap Sensor, 50K Thermistor	NSB-50K-S-A


STRAP TEMPERATURE SENSORS



	Strap Temperature Sensor with a BAPI-Box 2 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • For Pipes from 5 to 14.5" (130 to 370mm) in Diameter with up to 2" (50mm) of Insulation • BAPI-Box 2 Enclosure (IP66, NEMA 4X) Datasheet pdf	
	Strap Sensor	NSB-10K-2-STP-BB2-A
	Strap Temperature Sensor with a BAPI-Box 4 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • For Pipes from 5 to 14.5" (130 to 370mm) in Diameter with up to 2" (50mm) of Insulation • Polycarbonate and Nylon BAPI-Box 4 Enclosure (IP10 or IP44 with knockout plug in open port) Datasheet pdf	
	Strap Sensor	NSB-10K-2-STP-BB4-A



STRAP TEMPERATURE SENSORS



	Strap Temperature Sensor with a Junction Box Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • For Pipes from 5 to 14.5" (130 to 370mm) in Diameter with up to 2" (50mm) of Insulation • Metal Junction Box Enclosure Datasheet pdf	
	Strap Sensor	NSB-10K-2-STP-A



REMOTE PROBE TEMPERATURE SENSOR

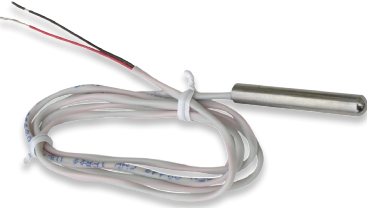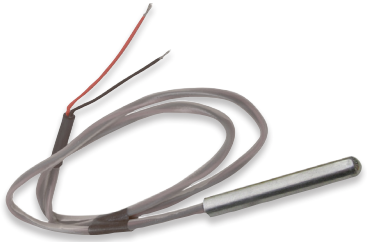

	Remote Probe Temperature Sensor with Plenum-Rated Cable <ul style="list-style-type: none"> • 10K-2 or 50K Thermistor Sensor • 1.75" Stainless Steel Probe, 1/4" Diameter • Plenum-Rated Cable Datasheet pdf	
	6" Plenum-Rated Cable, 10K-2 Thermistor	NSB-10K-2-RPP-6-A
	5' Plenum-Rated Cable, 10K-2 Thermistor	NSB-10K-2-RPP-5-A
	10' Plenum-Rated Cable, 10K-2 Thermistor	NSB-10K-2-RPP-10-A
	15' Plenum-Rated Cable, 10K-2 Thermistor	NSB-10K-2-RPP-15-A
	25' Plenum-Rated Cable, 10K-2 Thermistor	NSB-10K-2-RPP-25-A
	5' Plenum-Rated Cable, 50K Thermistor	NSB-50K-RPP-5-A
	Remote Probe Temperature Sensor with FEP-Jacketed Cable <ul style="list-style-type: none"> • 10K-2 or 50K Thermistor Sensor • 1.75" Stainless Steel Probe, 1/4" Diameter • FEP-Jacketed Cable or FEP-Jacketed Cable Suitable for Submersion Datasheet pdf	
	18" FEP-Jacketed Cable, 10K-2 Thermistor	NSB-10K-2-RPFEP-18-A
	5' FEP-Jacketed Cable, 10K-2 Thermistor	NSB-10K-2-RPFEP-5-A
	5' FEP-Jacketed Cable Suitable for Submersion, 10K-2 Thermistor	NSB-10K-2-RPFEP2-5-A
	25' FEP-Jacketed Cable Suitable for Submersion, 10K-2 Thermistor	NSB-10K-2-RPFEP2-25-A
	5' FEP-Jacketed Cable Suitable for Submersion, 50K Thermistor	NSB-50K-RPFEP2-5-A


THERMOBUFFER TEMPERATURE SENSORS



	Thermobuffer Hanging Bracket Temperature Sensor <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • 1" (25mm) Hanging Bracket Stainless Steel Buffer Chamber • 10' (3m) FEP-Jacketed Cable Leads Datasheet pdf	
	Hanging Bracket Thermobuffer	NSB-10K-2-TB-M304-1-HB-NB-10-A
	Thermobuffer Temperature Sensor with BAPI-Box 2 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • 2" (50mm) Attached Stainless Steel Buffer Chamber • BAPI-Box 2 Enclosure (IP66, NEMA 4X) Datasheet pdf	
	Thermobuffer with BAPI-Box 2	NSB-10K-2-TB-M304-2-BB2-A


WALL PLATE TEMPERATURE SENSORS



	Stainless Steel Wall Plate Temperature Sensor With or Without Logo <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • Stainless Steel Wall Plate • ALC Logo or No Logo Datasheet pdf	
	Wall Plate without Logo	NSB-10K-2-SP-BNK-A
	Wall Plate with ALC Logo	NSB-10K-2-SP-A


LOW PROFILE TEMPERATURE SENSORS



	Low Profile "Button" Temperature Sensor <ul style="list-style-type: none"> • 10K-2 or 50K Thermistor Sensor • Low Profile "Button" Temperature Sensor • Paintable with Latex or Oil Base Datasheet pdf	
	Button Sensor, 10K-2 Thermistor	NSB-10K-2-LPW-A
	Button Sensor, 50K Thermistor	NSB-50K-LPW-A



ROOM TEMPERATURE SENSORS



	Analog ZS2 Room Sensor With or Without ALC Logo <ul style="list-style-type: none"> • 10K-2 or 50K Thermistor Sensor • ZS2 Room Enclosure • With or Without ALC Logo Datasheet pdf	
	Sensor with 10K-2 Thermistor and No ALC Logo	NSB-ZS2-10K-2-B
	Sensor with 10K-2 Thermistor and ALC Logo	NSB-ZS2-10K-2-A
	Sensor with 50K Thermistor and ALC Logo	NSB-ZS2-50K-A



DUCT & OUTSIDE AIR TEMP/HUMIDITY SENSORS



	Duct Temp and Humidity Sensor with a BAPI-Box 2 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • BAPI-Box 2 Enclosure (IP66, NEMA 4X) • $\pm 2\%$RH Accuracy • 4 to 20mA or 0 to 5 VDC %RH Output Datasheet pdf	
	Duct Temp/Humidity Sensor	NSB-10K-2-H200-D-BB2-A
	Outside Air Temp and Humidity Sensor with a BAPI-Box 2 Enclosure <ul style="list-style-type: none"> • 10K-2 Thermistor Sensor • BAPI-Box 2 Enclosure (IP66, NEMA 4X) • $\pm 2\%$RH Accuracy • 4 to 20mA or 0 to 5 VDC %RH Output Datasheet pdf	
	Outside Air Temp/Humidity Sensor	NSB-10K-2-H200-O-BB2-A


DIFFERENTIAL AIR PRESSURE SENSORS







	ZPM Pressure Sensor <ul style="list-style-type: none"> Standard, Low and High Range Models 6" (150mm) Static Tube Included Field Selectable Outputs and Ranges 	
	Standard Ranges: -5 to +5" WC (-1,250 to +1,250 Pa)	NSB-ZPM-SR-ST-D-A
	Low Ranges: -1 to +1" WC (-250 to +250 Pa)	NSB-ZPM-LR-ST-D-A
	High Ranges: 0 to +30" WC (0 to +7,400 Pa)	NSB-ZPM-HR-ST-D-A
	EZ Panel Mount Pressure Sensor <ul style="list-style-type: none"> Standard and Low Range Models 6" (150mm) Static Tube Included Field Selectable Outputs and Ranges Datasheet pdf	
	Standard WC Ranges: -5 to +5" WC	NSB-ZPS-SR-EZ-ST-IN-A
	Standard Pa Ranges: -1,250 to +1,250 Pa	NSB-ZPS-SR-EZ-ST-PA-A
	Low WC Ranges: -1 to +1" WC	NSB-ZPS-LR-EZ-ST-IN-A
Low Pa Ranges: -250 to +250 Pa	NSB-ZPS-LR-EZ-ST-PA-A	

DIFFERENTIAL AIR PRESSURE SWITCHES







	Pressure Switch with a BAPI-Box Enclosure <ul style="list-style-type: none"> Seven Pressure Ranges are Field Configurable from 0.12" to 35.32" WC (30 Pa to 8,800 Pa) Factory Configured Field Adjustable Setpoint BAPI-Box Enclosure Datasheet pdf	
	0.5" to 1.2" WC (120 to 300 Pa) Pressure Range	NSB-ZPS-SW2-A
	0.7" to 2.2" WC (180 to 550 Pa) Pressure Range	NSB-ZPS-SW3-A



	<p>ZS2 Enclosure Style Room Pickup Port</p> <ul style="list-style-type: none"> Includes 80 Micron Filter Automated Logic Logo 	
	ZS2 Pickup Port	NSB-RSPPP-A
	<p>Stainless Steel Wall Plate Pickup Port</p> <ul style="list-style-type: none"> Includes 80 Micron Filter Automated Logic Logo <p>Datasheet pdf</p>	
	Wall Plate Pickup Port	NSB-ZPS-ACC01-A
	<p>Galvanized Steel Ceiling Tile Pickup Port</p> <ul style="list-style-type: none"> Includes 80 Micron Filter Fits Standard Ceiling Tile <p>Datasheet pdf</p>	
	Ceiling Tile Pickup Port	NSB-ZPS-ACC05-A
	<p>Outside Air Pressure Pickup Port</p> <ul style="list-style-type: none"> Metal and UV-Resistant Plastic Enclosure Helps Stabilize Readings by Reducing Fluctuations from Wind Gust <p>Datasheet pdf</p>	
	Outside Air Pickup Port	NSB-ZPS-ACC10-A

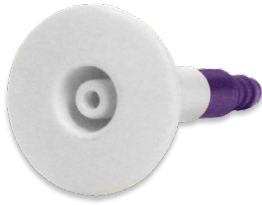

	<p>Low Profile Room Pressure Pickup Port</p> <ul style="list-style-type: none"> • Paintable with Latex or Oil Base • Five Micron Filter and Built in Surge Damper <p>Datasheet pdf</p>	
	<p>Low Profile Pickup Port</p>	<p>NSB-ZPS-ACC20-A</p>
	<p>6" (150mm) Static Pressure Probe Assembly</p> <ul style="list-style-type: none"> • 6" (150mm) Aluminum Static Tube • Includes Foam Pad, Rubber Tubing with Surge Damper, Sheet Metal Screws and Bulkhead Fitting <p>Datasheet pdf</p>	
	<p>6" (150mm) Static Pressure Probe Assembly</p>	<p>NSB-ZPS-ACC07-A</p>
	<p>6" (150mm) Static Pressure Probe</p> <ul style="list-style-type: none"> • 6" (150mm) Aluminum Static Tube • Includes Round Foam Gasket 	
	<p>6" (150mm) Static Pressure Probe</p>	<p>NSB-ZPS-ACC08-A</p>
	<p>3.5" (90mm) Duct Pitot Pressure Probe Assembly</p> <ul style="list-style-type: none"> • Includes a Total Pressure Probe Assembly and a Static Pressure Probe Assembly • 3.5" (90mm) Tube Length 	
	<p>3.5" (90mm) Pitot Probe Assembly</p>	<p>NSB-ZPS-ACC11-A</p>







	CO₂ Duct Sensor, Single Channel or Dual Channel <ul style="list-style-type: none"> • Single Channel for Periodically Unoccupied Areas • Dual Channel for Continuously Occupied Areas • 0 to 2,000 PPM Range, 0 to 5 VDC Output 	
	CO ₂ Duct Sensor, Single Channel	NSB-ACD05-D-BB-LED-A
	CO ₂ Duct Sensor, Dual Channel	NSB-DCD05-D-BB-LED-A
	CO Rough Service Sensor in a Ventilated BAPI-Box <ul style="list-style-type: none"> • 0 to 500 PPM CO Range • Four Field Selectable VDC Outputs • Field Replaceable CO Sensor 	
	CO Rough Service Sensor	NSB-BBV-CO-A
	CO, Temp and Humidity Rough Service Sensor in a Ventilated BAPI-Box <ul style="list-style-type: none"> • 0 to 500 PPM CO Range • 10K-2 Thermistor Temperature Sensor • Four Field Selectable VDC CO & Humidity Outputs 	
	CO, Temp and Humidity Rough Service Sensor	NSB-BBV-COV-102-H-A
	CO Programmable Duct Sensor with Aspiration Tube <ul style="list-style-type: none"> • 4 Field Selectable CO Ranges: 0 to 100, 0 to 200, 0 to 300 and 0 to 500 PPM • Two Independent Alarm Relays • Field Selectable CO Output of 4 to 20 mA, 0 to 5, 1 to 5, 0 to 10 or 2 to 10 VDC Datasheet pdf	
	CO Programmable Duct Sensor	NSB-CO-D-BB-A
	CO Programmable Rough Service Sensor with Ventilated BAPI-Box <ul style="list-style-type: none"> • 4 Field Selectable CO Ranges: 0 to 100, 0 to 200, 0 to 300 and 0 to 500 PPM • Two Independent Alarm Relays • Field Selectable CO Output of 4 to 20 mA, 0 to 5, 1 to 5, 0 to 10 or 2 to 10 VDC Datasheet pdf	
	CO Programmable Rough Service Sensor	NSB-CO-V-BB-A








	<p>CO Replacement Module for Non-Room CO Sensor</p> <ul style="list-style-type: none"> • Easy Field Replacement • Approximate 7 Year Life Span
	<p>NO₂ Programmable Duct Sensor with Aspiration Tube</p> <ul style="list-style-type: none"> • 4 Field Selectable NO₂ Ranges: 0 to 2.5, 0 to 5, 0 to 7.5 and 0 to 10 PPM • Two Independent Alarm Relays • Field Selectable NO₂ Output of 4 to 20 mA, 0 to 5, 1 to 5, 0 to 10 or 2 to 10 VDC
	<p>NO₂ Programmable Rough Service Sensor with Ventilated BAPI-Box</p> <ul style="list-style-type: none"> • 4 Field Selectable NO₂ Ranges: 0 to 2.5, 0 to 5, 0 to 7.5 and 0 to 10 PPM • Two Independent Alarm Relays • Field Selectable NO₂ Output of 4 to 20 mA, 0 to 5, 1 to 5, 0 to 10 or 2 to 10 VDC
	<p>NO₂ Replacement Module for Non-Room NO₂ Sensor</p> <ul style="list-style-type: none"> • Easy Field Replacement • Approximate 7 Year Life Span






	<p>Water Leak Detector - Spot Sensor with BAPI-Box Enclosure</p> <ul style="list-style-type: none"> • Built-In Probe Sensor • Two 5A SPDT Relay Contacts • BAPI-Box Enclosure (IP66, NEMA 4) <p>Datasheet pdf</p>
	<p>Spot Sensor NSB-LDT4-PS-BB-A</p>
	<p>Water Leak Detector - Remote Spot Sensor with BAPI-Box Enclosure</p> <ul style="list-style-type: none"> • Remote Sensor with 10' Cable Length • Two 5A SPDT Relay Contacts • BAPI-Box Enclosure (IP66, NEMA 4)) <p>Datasheet pdf</p>
	<p>Remote Spot Sensor NSB-LDT4-RS10-BB-A</p>
	<p>Water Leak Detector - Remote Rope Sensor with BAPI-Box Enclosure</p> <ul style="list-style-type: none"> • 10, 25, 50 or 100' (3, 7.5, 15 or 30m) Rope Sensor that Detects Water Along Entire Length • Two 5A SPDT Relay Contacts • BAPI-Box Enclosure (IP66, NEMA 4)) <p>Datasheet pdf</p>
	<p>10' (3.0m) Rope Length NSB-LDT4-RR10-BB-A</p>
	<p>25' (7.5m) Rope Length NSB-LDT4-RR25-BB-A</p>
	<p>50' (15m) Rope Length NSB-LDT4-RR50-BB-A</p>
	<p>100' (30m) Rope Length NSB-LDT4-RR100-BB-A</p>
	<p>Refrigerant Leak Detector in a BAPI-Box Enclosure</p> <ul style="list-style-type: none"> • 0 to 5 VDC Output • Detects Most Modern Refrigerants • BAPI-Box Enclosure <p>Datasheet pdf</p>
	<p>Refrigerant Leak Detector NSB-RLD-A</p>








	<p>Voltage Converter (350mA)</p> <ul style="list-style-type: none"> Adjustable Output of 5 to 24 VDC DIN Rail, Snaptrack or Surface Mount Self-Resetting Thermal Fuse <p>Datasheet pdf</p>	<p>Voltage Converter (350mA)</p> <p>NSB-VC350A-EZ-ADJ-A</p>
	<p>Thermostat Guard</p> <ul style="list-style-type: none"> Prevents Tampering, Damage and Unauthorized Adjustment Exceptional Airflow Made from Thick, Durable Polycarbonate <p>Datasheet pdf</p>	<p>Thermostat Guard</p> <p>NSB-BG2-A</p>
 <p>Bright White</p> <p>Off White</p>	<p>Adaptor Plates for Retrofits - 3.75 x 5.5" (95.3 x 140mm)</p> <ul style="list-style-type: none"> ABS Flame-Retardant Plastic Covers Wall Imperfections When Replacing Wall Sensors or Thermostats Bright White or Off White Color 	<p>3.75 x 5.5" (95.3 x 140mm) - Bright White (Matches ZS2 Sensors)</p> <p>NSB-ADP-37-55-BW-A</p> <p>3.75 x 5.5" (95.3 x 140mm) - Off White</p> <p>NSB-ADP-37-55-OFW-A</p>
 <p>Bright White</p> <p>Off White</p>	<p>Adaptor Plates for Retrofits - 5.25 x 7", Bright White or Off White Color</p> <ul style="list-style-type: none"> ABS Flame-Retardant Plastic Covers Wall Imperfections When Replacing Wall Sensors or Thermostats 	<p>5.25 x 7" (133.5 x 178mm) - Bright White (Matches ZS2 Sensors)</p> <p>NSB-ADP-525-7-BW-A</p> <p>5.25 x 7" (133.5 x 178mm) - Off White</p> <p>NSB-ADP-525-7-OFW-A</p>
 <p>Bright White</p> <p>Off White</p>	<p>Adaptor Plates for Retrofits - 5.3 x 5.3", Bright White or Off White Color</p> <ul style="list-style-type: none"> ABS Flame-Retardant Plastic Covers Wall Imperfections When Replacing Wall Sensors or Thermostats 	<p>5.3 x 5.3" (134.5 x 134.5mm) - Bright White (Matches ZS2 Sensors)</p> <p>NSB-ADP-53-53-BW-A</p> <p>5.3 x 5.3" (134.5 x 134.5mm) - Off White</p> <p>NSB-ADP-53-53-OFW-A</p>



	Foamback Insulators - 0.125" (3.2mm) and 0.250" (6.3mm) Thickness <ul style="list-style-type: none"> Ensures that Room Sensors are Reading the Temperature of the Room, not the Wall Used to insulate a remote probe temperature sensor when mounted to a small pipe Measures 2.6" Wide by 4.4" High 	
	Foamback Insulator, 0.125" (3.2mm) Thick	NSB-FB-.125-A
	Foamback Insulator, 0.25" (6.3mm) Thick	NSB-FB-.250-A
	Pierceable Knockout Plug for Enclosure Ports <ul style="list-style-type: none"> Pierceable Center Membrane Works in Non-Threaded Ports of the BAPI-Box 4 and Junction Box Enclosures Sold in Pack of 100 	
	Pierceable Knockout Plug, Pack of 100	NSB-PKP-100-A
	Flexible Probe Bracket, Averaging Sensor Mounting Bracket <ul style="list-style-type: none"> For Quick and Easy Mounting of Averaging Probes Scored Break-off for 1/4" Rigid Probe Mounting Sold in Pack of 50 	
	Flexible Probe Bracket, Pack of 50	NSB-PB-50-A

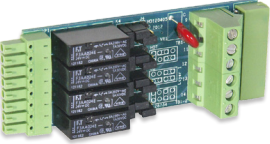

	<p>OUT64A - Output Terminal Board</p> <ul style="list-style-type: none"> • Provides Field Wiring Terminations for the SE6104A Controller Outputs • Reduces Installation, Panel Building, Project Materials and Engineering Costs
	<p>OUT64A - Output Terminal Board NSB-OUT64A</p>
	<p>OUT66 - Output Terminal Board</p> <ul style="list-style-type: none"> • Provides Field Wiring Terminations for the SE6166 Controller Outputs • Reduces Installation, Panel Building, Project Materials and Engineering Costs
	<p>OUT66 - Output Terminal Board NSB-OUT66</p>
	<p>UIU04 - Output Terminal Board</p> <ul style="list-style-type: none"> • Provides Field Wiring Terminations for ME812U, MEX816U, MEX88U, MEX016U, ME812U-LGR Controllers or Expander Modules • Reduces Installation, Panel Building, Project Materials and Engineering Costs
	<p>UIU04 - Output Terminal Board NSB-UIU04</p>
	<p>UO4R - Output Relay Board</p> <ul style="list-style-type: none"> • Plugs into the Outputs on the ME(X) Line of Controllers or Expander Modules • Can provide 24 VAC/VDC Output to Power Relays, a Dry Contact Output or a Standard Universal Output
	<p>UO4R - Output Relay Board NSB-UO4R</p>
	<p>Relay Pack for the ZN551 Controller</p> <ul style="list-style-type: none"> • Adds High Voltage/High Current Switching for a ZN Controller • 5 Relay Outputs with a Selectable Sixth Output • LED Indication of Digital Output Status
	<p>Relay Pack for the ZN551 Controller NSB-RP-ZN551</p>



Automated Logic Corporation

1150 Roberts Blvd, Kennesaw, GA 30144, USA

phone: (770) 429-3000

web: www.automatedlogic.com