

# Selection Guide for Delta Controls Sensors from BAPI



TEMPERATURE



HUMIDITY



PRESSURE



AIR QUALITY



ACCESSORIES

All products available wherever you purchase your Delta Controls products

  
C O N T R O L S  
A Delta Group Company







This page is intentionally left blank.

# TABLE OF CONTENTS


	<u>PAGE</u>
<b>PRODUCTS</b>	
<b>Blü-Test Wireless Test Instruments</b>	
Blü-Test NIST-Traceable Test Instruments for Temperature, Humidity and Differential Pressure .....	4
<b>Room Temperature, Humidity or Temp/Humidity Sensors</b>	
Room Temperature, Humidity or Temp/Humidity Sensors .....	4-5
<b>Duct Temperature Sensors</b>	
Duct Temperature Sensor .....	6-7
<b>Duct Averaging Temperature Sensors</b>	
Flexible Duct Averaging Temperature Sensor .....	7-8
Rigid Duct Averaging Temperature Sensor .....	8
<b>Immersion Temperature Sensors and Thermowells</b>	
Immersion Temperature Sensors and Thermowells .....	8-10
<b>Remote Temperature Probes</b>	
Remote Temperature Probe with Plenum-Rated or FEP-Jacketed Cable .....	11
<b>Outside Air Temperature Sensors</b>	
Outside Air Temperature Sensor .....	11
<b>Wall Plate Temperature Sensors</b>	
Wall Plate Temperature Sensor .....	12
<b>Clamp-On and Strap Temperature Sensors</b>	
Clamp-On and Strap Temperature Sensor .....	13
<b>Low Profile "Button" Temperature Sensors</b>	
Low Profile "Button" Temperature Sensor .....	14
<b>Thermobuffer Temperature Sensors</b>	
Thermobuffer Temperature Sensor for Freezers and Coolers .....	14
<b>Duct and Outside Air Temperature and Humidity Sensors</b>	
Duct and Outside Air Temperature and Humidity Sensors .....	15-16
<b>Pressure Sensors</b>	
ZPM Pressure Sensor, IP44/NEMA 2 or IP66/NEMA 4 Models .....	17
EZ Pressure Sensor .....	17
Pressure Switches .....	18
<b>Pressure Pickup Ports and Probes</b>	
Room, Wall, Ceiling and Outside Air Pickup Ports and Static and Pitot Tube Assemblies .....	18-19
<b>Carbon Dioxide (CO<sub>2</sub>) Sensors</b>	
Carbon Dioxide (CO <sub>2</sub> ) Duct and Rough Service .....	19
<b>Volatile Organic Compound (VOC) Sensors</b>	
Volatile Organic Compound (VOC) Duct and Room Sensors .....	20
<b>Carbon Monoxide (CO) Sensors</b>	
Carbon Monoxide (CO) Rough Service Sensors with Optional BACnet Output .....	20
<b>Particulate Matter (PM) Sensors</b>	
Particulate Matter (PM) Room Sensors .....	20
<b>Accessories for HVAC/R</b>	
Water Leak Detectors .....	21
Voltage Converter (350mA) with Adjustable 5 to 24 VDC Output .....	21
Thermostat Guard .....	21
Adaptor Plate for Retrofits .....	21
Spanner Bit for Spanner Security Screws .....	21
Foamback Insulator for Room Units .....	22
Flexible Probe Bracket for Averaging Probes .....	22
Screwdriver and Allen Wrench Combination .....	22

# BLÜ-TEST WIRELESS TEST INSTRUMENTS




	<b>Blü-Test Temperature and Temp/Humidity Probes</b> <ul style="list-style-type: none"> <li>• NIST-Traceable Test Instruments with Data Logging and Bluetooth Communication</li> <li>• Each Probe Stores Up To One Million Readings in its Onboard Memory</li> <li>• Blü-Test App for Android and iOS Smart Devices — No More Hand Recording!</li> </ul>	 Blü-Test App
	Temperature Only 6" (150mm) Probe	<b>DCW1402023</b>
	Temperature and Humidity 8" (200mm) Probe	<b>DCW1402037</b>
	<b>Blü-Test Differential Pressure Probes - Standard and Low Range</b> <ul style="list-style-type: none"> <li>• NIST-Traceable Test Instruments with Data Logging and Bluetooth Communication</li> <li>• Each Probe Stores Up To One Million Readings in its Onboard Memory</li> <li>• Blü-Test App for Android and iOS Smart Devices — No More Hand Recording!</li> </ul>	 Blü-Test App
	Standard Range Differential Pressure Probe	<b>DCW1402043</b>
	Low Range Differential Pressure Probe	<b>DCW1402022</b>
	<b>Blü-Test Bundle and Carrying Case</b> <ul style="list-style-type: none"> <li>• Bundle with Case and 6 Probes - One 8" (200mm) Temp/Humidity Probe</li> <li>• 3 Temp Only Probes - 9.5" (240mm), 6" (150mm) and piercing 4" (100mm)</li> <li>• 2 Differential Pressure Probes - One Standard Range and One Low Range</li> <li>• Carrying Case Only with Room for Up to Six Probes</li> </ul>	 Blü-Test App
	Blü-Test Bundle with 6 Probes and Carrying Case	<b>DCW1402033</b>
	Carrying Case Only (with room for up to six probes)	<b>DCW1402024</b>





# ROOM TEMPERATURE SENSORS

 Shown with optional override	<b>Delta Style Room Temperature Sensor with Setpoint and Optional Override</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• 0 to 10K or 0 to 20K Setpoint Output</li> <li>• Optional Override, Configured in Parallel with the Sensor or the Setpoint</li> </ul>	
	Sensor with 0 to 10K Setpoint Output and No Override	<b>DCW1402157</b>
	Sensor with 0 to 20K Setpoint Output and No Override	<b>DCW1402145</b>
	Sensor with 0 to 20K Setpoint Output and Override in Parallel with Sensor	<b>DCW1402142</b>
	Sensor with 0 to 20K Setpoint Output and Override in Parallel with Setpoint	<b>DCW1402148</b>

# ROOM TEMPERATURE SENSORS

	<b>Delta Style Room Temperature Sensor with Optional Override</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Optional Override, Configured in Parallel with the Sensor or as a Separate Output</li> </ul>	
	Sensor without Override	<b>DCW1402143</b>
	Sensor with Override in Parallel with Sensor	<b>DCW1402146</b>
	Sensor with Override as a Separate Output	<b>DCW1402149</b>

# ROOM HUMIDITY OR TEMP/HUMIDITY SENSORS

	<b>Delta Style Room Humidity or Temp/Humidity Sensor with Display</b> <ul style="list-style-type: none"> <li>• Optional 10K-3 Thermistor Sensor and <math>\pm 2\%</math> RH Accuracy</li> <li>• Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output; or 0 to 10 VDC %RH Output</li> </ul>	
	Temp/Humidity Sensor, Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output	<b>DCW1402153</b>
	<b>Delta Style Room Temp/Humidity Sensor without Display</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor and <math>\pm 2\%</math> RH Accuracy</li> <li>• Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output; or 0 to 10 VDC %RH Output</li> </ul>	
	Temp/Humidity Sensor with 0 to 10 VDC %RH Output	<b>DCW1402147</b>
	Temp/Humidity Sensor with Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output	<b>DCW1402144</b>
	<b>BAPI-Stat 4 Style Room Temp/Humidity Sensor with Temp Setpoint</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• 0 to 10 VDC %RH Output and 0 to 10K Setpoint Output</li> </ul>	
	Temp/Humidity Sensor with Temp Setpoint	<b>DCW1400657</b>
	<b>BAPI-Stat "Quantum" Style Room Humidity Sensor</b> <ul style="list-style-type: none"> <li>• 0 to 10 VDC %RH Output</li> <li>• Modern BAPI-Stat "Quantum" Enclosure Style</li> </ul>	
	Humidity Sensor	<b>DCW1402019</b>


# DUCT TEMPERATURE SENSORS



	<b>Duct Temp Sensor with a BAPI-Box 2 Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Duct Probe, 1/4" (6mm) Diameter</li> <li>• Polycarbonate BAPI-Box 2 Enclosure (IP66, NEMA 4X)</li> </ul>	
	4" (100mm) Stainless Steel Probe	<b>DCW1400181</b>
	8" (200mm) Stainless Steel Probe	<b>DCW1400180</b>
	12" (300mm) Stainless Steel Probe	<b>DCW1400178</b>
	18" (450mm) Stainless Steel Probe	<b>DCW1400179</b>
	<b>Duct Temp Sensor with a BAPI-Box 4 Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Duct Probe, 1/4" (6mm) Diameter</li> <li>• Polycarbonate and Nylon BAPI-Box 4 Enclosure (IP10 or IP44 with knockout plug in open port)</li> </ul>	
	4" (100mm) Stainless Steel Probe	<b>DCW1401838</b>
	8" (200mm) Stainless Steel Probe	<b>DCW1401848</b>
	12" (300mm) Stainless Steel Probe	<b>DCW1401837</b>
	18" (450mm) Stainless Steel Probe	<b>DCW1401850</b>
	<b>Duct Temp Sensor with No Box</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Duct Probe, 1/4" (6mm) Diameter</li> <li>• Plastic No Box Mounting Bracket</li> </ul>	
	4" (100mm) Probe, 5' (1.5m) Leads	<b>DCW1400108</b>
	4" (100mm) Probe, 10' (3.0m) Leads	<b>DCW1400264</b>
	8" (200mm) Probe, 5' (1.5m) Leads	<b>DCW1400368</b>
	12" (300mm) Probe, 5' (1.5m) Leads	<b>DCW1400107</b>



# DUCT TEMPERATURE SENSORS

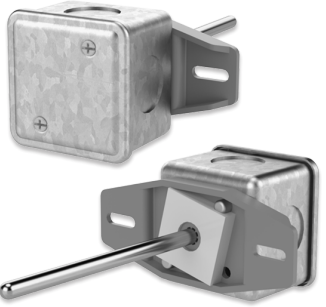

	<b>Duct Temp Sensor with a Junction Box Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Duct Probe, 1/4" (6mm) Diameter</li> <li>• Metal Junction Box Enclosure</li> </ul>	
	4" (100mm) Probe	<b>DCW1400160</b>
	8" (200mm) Probe	<b>DCW1400100</b>
	12" (300mm) Probe	<b>DCW1400101</b>
	18" (450mm) Probe	<b>DCW1400102</b>


# DUCT AVERAGING TEMPERATURE SENSORS



	<b>Duct Averaging Temp Sensor with a BAPI-Box 2 Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Bendable Aluminum Probe, 3/16" (4.8mm) Diameter</li> <li>• Polycarbonate Polycarbonate BAPI-Box 2 Enclosure (IP66, NEMA 4X)</li> </ul>	
	8' (2.4m) Probe	<b>DCW1400777</b>
	12' (3.6m) Probe	<b>DCW1400176</b>
	24' (7.3m) Probe	<b>DCW1400177</b>
	<b>Duct Averaging Temp Sensor with a BAPI-Box 4 Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Bendable Aluminum Probe, 3/16" (4.8mm) Diameter</li> <li>• Polycarbonate and Nylon BAPI-Box 4 Enclosure (IP10 or IP44 with knockout plug in open port)</li> </ul>	
	8' (2.4m) Probe	<b>DCW1401892</b>
	12' (3.6m) Probe	<b>DCW1401891</b>
	24' (7.3m) Probe	<b>DCW1401836</b>


# DUCT AVERAGING TEMPERATURE SENSORS



	<b>Duct Averaging Temp Sensor with a Junction Box Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Bendable Aluminum Probe, 3/16" (4.8mm) Diameter</li> <li>• Metal Junction Box Enclosure</li> </ul>	
	8' (2.4m) Probe	DCW1400150
	12' (3.6m) Probe	DCW1400151
	24' (7.3m) Probe	DCW1400152


# RIGID AVERAGING TEMPERATURE SENSORS

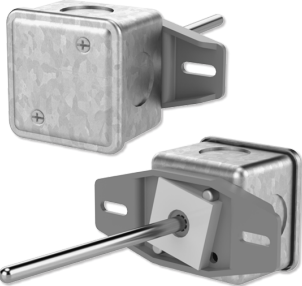

	<b>Rigid Averaging Temp Sensor with a Junction Box Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Averaging Probe, 1/4" (6mm) Diameter</li> <li>• Metal Junction Box Enclosure</li> </ul>	
	12" (300mm) Probe	DCW1400164
	24" (600mm) Probe	DCW1400162


# IMMERSION TEMPERATURE SENSORS




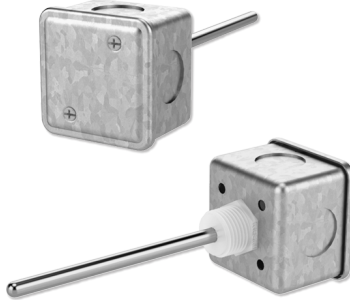
	<b>Immersion Temp Sensor with a BAPI-Box 2 Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Immersion Probe, Nylon Threads</li> <li>• Polycarbonate Polycarbonate BAPI-Box 2 Enclosure (IP66, NEMA 4X)</li> </ul>	
	2" (50mm) Probe	DCW1400297
	4" (100mm) Probe	DCW1400298
	8" (200mm) Probe	DCW1400299


# IMMERSION TEMPERATURE SENSORS



	<b>Immersion Temp Sensor with a BAPI-Box 4 Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Immersion Probe, Nylon Threads</li> <li>• Polycarbonate and Nylon BAPI-Box 4 Enclosure (IP10 or IP44 with knockout plug in open port)</li> </ul>	
	2" (50mm) Probe	DCW1401851
	4" (100mm) Probe	DCW1401855
	8" (200mm) Probe	DCW1401890


	<b>Immersion Sensor &amp; Machined Brass Thermowell with a BAPI-Box 4 Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Immersion Probe, Nylon Threads and Matching Machined Brass Thermowell</li> <li>• Polycarbonate and Nylon BAPI-Box 4 Enclosure (IP10 or IP44 with knockout plug in open port)</li> </ul>	
	2" (50mm) Probe with Machined Brass Thermowell	DCW1401905
	4" (100mm) Probe with Machined Brass Thermowell	DCW1401906
	8" (200mm) Probe with Machined Brass Thermowell	DCW1401907

	<b>Immersion Temp Sensor with a Junction Box Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Immersion Probe, Nylon Threads</li> <li>• Metal Junction Box Enclosure</li> </ul>	
	2" (50mm) Probe	DCW1400316
	4" (100mm) Probe	DCW1400300
	8" (200mm) Probe	DCW1400301

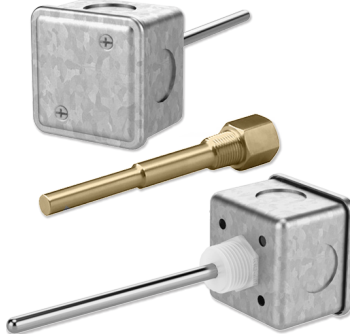	<b>Immersion Sensor &amp; Machined Brass Thermowell with a Junction Box</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Immersion Probe, Nylon Threads and Matching Machined Brass Thermowell</li> <li>• Metal Junction Box Enclosure</li> </ul>	
	2" (50mm) Probe with Machined Brass Thermowell	DCW1400317
	4" (100mm) Probe with Machined Brass Thermowell	DCW1400302
	8" (200mm) Probe with Machined Brass Thermowell	DCW1400303




# IMMERSION TEMPERATURE SENSORS



	<b>Immersion Sensor &amp; Machined 304SS Thermowell with a Junction Box</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Immersion Probe with Nylon Threads and</li> <li>• Matching Machined 304SS Thermowell</li> <li>• Metal Junction Box Enclosure</li> </ul>	
	4" (100mm) Probe with Machined 304SS Thermowell	DCW1400513




# THERMOWELLS FOR IMMERSION SENSORS



 <p>Machined Brass</p>  <p>Machined 304SS &amp; 316SS</p>  <p>Welded 304SS</p>	<b>Thermowells for Immersion Sensors</b> <ul style="list-style-type: none"> <li>• Machined Brass, Machined 304SS or Machined 316SS</li> <li>• 2, 4 &amp; 8" (50, 100 &amp; 200mm) Lengths to Fit Standard Immersion Sensors</li> </ul>	
	2" (50mm) Machined Brass	DCW1400047
	4" (100mm) Machined Brass	DCW1400506
	8" (200mm) Machined Brass	DCW1400507
	2" (50mm) Machined 304SS	DCW1400322
	4" (100mm) Machined 304SS	DCW1400502
	8" (200mm) Machined 304SS	DCW1400503
	2" (50mm) Machined 316SS	DCW1402310
	4" (100mm) Machined 316SS	DCW1400504


# REMOTE PROBE AND SENSORS



	<b>Remote Probe Temperature Sensor with Plenum-Rated Cable</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• 1.75" (44mm) Stainless Steel Probe, 1/4" (6mm) Diameter</li> <li>• Plenum-Rated Cable</li> </ul>	
	18" (450mm) Cable	DCW1400036
	5' (1.5m) Cable	DCW1400411
	10' (3.0m) Cable	DCW1400487
	<b>Remote Probe Temperature Sensor with FEP-Jacketed Cable</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• 1.75" (44mm) Stainless Steel Probe, 1/4" (6mm) Diameter</li> <li>• FEP-Jacketed Cable</li> </ul>	
	18" (450mm) Cable	DCW1400366
	5' (1.5m) Cable	DCW1400856
	<b>Remote Temperature Sensor with Plenum-Rated Cable</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• 0.75" (19mm) Encapsulation Shell</li> <li>• Plenum-Rated Cable</li> </ul>	
	18" (450mm) Leads	DCW1400021






# OUTSIDE AIR TEMPERATURE SENSOR



	<b>Outside Air Temperature Sensor with a BAPI-Box 2 Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Well-Vented Sensor Guard</li> <li>• Polycarbonate BAPI-Box 2 Enclosure (IP66, NEMA 4X)</li> </ul>	
	Outside Air Temp Sensor	DCW1400199




# WALL PLATE TEMPERATURE SENSORS



	<b>Stainless Steel Wall Plate Temperature Sensor</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Wall Plate</li> </ul>	
	Wall Plate	DCW1400006
	<b>Stainless Steel Louvered Wall Plate Temperature Sensor</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Louvered Stainless Steel Wall Plate</li> </ul>	
	Louvered Wall Plate	DCW1400055
	<b>Stainless Steel Wall Plate Temp Sensor with Low Profile Pushbutton Override</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Wall Plate with Low Profile Pushbutton Override</li> </ul>	
	Wall Plate with Low Profile Override	DCW1400085
	<b>Stainless Steel Wall Plate Temperature Sensor with Spanner Security Screws</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Wall Plate with Spanner Security Screws</li> </ul>	
	Wall Plate with Spanner Security Screws	DCW1400117
	<b>Stainless Steel Wall Plate Temperature Sensor with Rotary Setpoint</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Stainless Steel Wall Plate with Rotary Setpoint</li> <li>• 0 to 10K Ohms Setpoint Output</li> </ul>	
	Wall Plate with Rotary Setpoint	DCW1400492


# CLAMP-ON TEMPERATURE SENSORS



	<b>Clamp-On Strap Temperature Sensor with a BAPI-Box 2 Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• For Pipes from 2 to 4.5" (50 to 114mm) in Diameter</li> <li>• Polycarbonate BAPI-Box 2 Enclosure (IP66, NEMA 4X)</li> </ul>	
	Clamp-On Strap Sensor with BAPI-Box 2	DCW1400441
	<b>Clamp-On Strap Temperature Sensor with a BAPI-Box Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• For Pipes from 2 to 4.5" (50 to 114mm) in Diameter</li> <li>• Polycarbonate BAPI-Box Enclosure (IP66, NEMA 4X)</li> </ul>	
	Clamp-On Strap Sensor with BAPI-Box	DCW1400403
	<b>Clamp-On Strap Temperature Sensor with a Junction Box Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• For Pipes from 2 to 4.5" (50 to 114mm) in Diameter</li> <li>• Metal Junction Box Enclosure</li> </ul>	
	Clamp-On Strap Sensor with Junction Box	DCW1400402

# STRAP TEMPERATURE SENSORS



	<b>Strap Temperature Sensor with a Junction Box Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• For Pipes from 5 to 14.5" (130 to 370mm) in Diameter with up to 2" (50mm) of Insulation</li> <li>• Metal Junction Box Enclosure</li> </ul>	
	Strap Sensor with Junction Box	DCW1400401

# LOW PROFILE TEMPERATURE SENSORS



	<b>Low Profile "Button" Temperature Sensor</b> <ul style="list-style-type: none"> <li>• 10K-3 Standard or Extra Precision Thermistor Sensor</li> <li>• Black or White Color</li> <li>• Paintable with Latex or Oil Base</li> </ul>	
	Black Button Sensor with 10K-3 Thermistor	<b>DCW1402230</b>
	White Button Sensor with 10K-3 Thermistor	<b>DCW1402228</b>
	White Button Sensor with Extra Precision 10K-3 Thermistor	<b>DCW1400467</b>

# THERMOBUFFER TEMPERATURE SENSORS



	<b>Thermobuffer Hanging Bracket Temperature Sensor</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• 1" (25mm) Hanging Bracket Stainless Steel Buffer Chamber</li> <li>• 10' (3.0m) FEP-Jacketed Cable</li> </ul>	
	Hanging Bracket Thermobuffer	<b>DCW1400483</b>
	<b>Thermobuffer Hanging Bracket Temp Sensor with BAPI-Box 2 Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• 1" (25mm) Hanging Bracket Stainless Steel Buffer Chamber with 10' (3.0m) FEP-Jacketed Cable</li> <li>• Polycarbonate BAPI-Box 2 Enclosure (IP66, NEMA 4X)</li> </ul>	
	Hanging Bracket Thermobuffer with BAPI-Box 2	<b>DCW1400688</b>

# DUCT TEMP/HUMIDITY SENSORS



	<b>Duct Temp and Humidity Sensor with a BAPI-Box 2 Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Polycarbonate BAPI-Box 2 Enclosure (IP66, NEMA 4X)</li> <li>• ±2%RH Accuracy</li> <li>• Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output, or 0 to 10VDC %RH Output</li> </ul>	
	Temp/Humidity, ±2%RH Accuracy, Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output	<b>DCW1402103</b>
	Temp/Humidity, ±2%RH Accuracy, 0 to 10 VDC %RH Output	<b>DCW1402104</b>
	Humidity Only, ±2%RH Accuracy, Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output	<b>DCW1401106</b>
	<b>Duct Temp and Humidity Sensor with a BAPI-Box Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Polycarbonate BAPI-Box Enclosure (IP66, NEMA 4X)</li> <li>• ±2%RH or ±3%RH Accuracy</li> <li>• Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output, or 0 to 10VDC %RH Output</li> </ul>	
	Temp/Humidity, ±2%RH Accuracy, Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output	<b>DCW1400369</b>
	Temp/Humidity, ±3%RH Accuracy, 0 to 10 VDC %RH Output	<b>DCW1400222</b>
	Humidity Only, ±2%RH Accuracy, Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output	<b>DCW1401102</b>

# OUTSIDE AIR TEMP/HUMIDITY SENSORS





	<b>Outside Air Temp and Humidity Sensor with a BAPI-Box 2 Enclosure</b> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Polycarbonate BAPI-Box 2 Enclosure (IP66, NEMA 4X)</li> <li>• ±2%RH Accuracy</li> <li>• Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output, or 0 to 10VDC %RH Output</li> </ul>	
	Temp/Humidity, ±2%RH Accuracy, Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output	<b>DCW1402204</b>
	Temp/Humidity, ±2%RH Accuracy, 0 to 10 VDC %RH Output	<b>DCW1402205</b>

# OUTSIDE AIR TEMP/HUMIDITY SENSORS






**Delta**  
CONTROLS  
A Delta Group Company

	<p><b>Outside Air Temp and Humidity Sensor with a BAPI-Box Enclosure</b></p> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Polycarbonate BAPI-Box Enclosure (IP66, NEMA 4X)</li> <li>• ±2%RH Accuracy</li> <li>• Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output</li> </ul>
<p>Temp/Humidity, ±2%RH Accuracy, Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output <b>DCW1402203</b></p>	
	<p><b>Outside Air Temp and Humidity Sensor with a Weatherproof Enclosure</b></p> <ul style="list-style-type: none"> <li>• 10K-3 Thermistor Sensor</li> <li>• Cast Aluminum Enclosure (IP24, NEMA 3R)</li> <li>• ±3%RH Accuracy</li> <li>• Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output</li> </ul>
<p>Temp/Humidity, ±2%RH Accuracy, Interchangeable 4 to 20mA or 0 to 5 VDC %RH Output <b>DCW1402200</b></p>	

# DIFFERENTIAL AIR PRESSURE SENSORS





**Delta**  
CONTROLS  
A Delta Group Company

	<p><b>ZPM Pressure Sensor</b></p> <ul style="list-style-type: none"> <li>• Standard and Low Range Models</li> <li>• Optional 6" (150mm) Static Tube Included</li> <li>• Field Selectable Outputs and Ranges</li> </ul>
<p>Standard Ranges, -5 to +5" WC (-1,250 to +1,250 Pa), Included 6" (150mm) Static Tube <b>DCW1402343</b></p>	
<p>Standard Ranges, -5 to +5" WC (-1,250 to +1,250 Pa), No Included Static Tube <b>DCW1400146</b></p>	
<p>Low Ranges, -1 to +1" WC (-250 to +250 Pa), No Included Static Tube <b>DCW1400478</b></p>	
	<p><b>ZPM Pressure Sensor in a BAPI-Box Enclosure (IP66, NEMA 4)</b></p> <ul style="list-style-type: none"> <li>• Polycarbonate BAPI-Box Enclosure (IP66, NEMA 4)</li> <li>• Optional 6" (150mm) Static Tube Included</li> <li>• Field Selectable Outputs and Ranges</li> </ul>
<p>Low Ranges, -1 to +1" WC (-250 to +250 Pa), No Included Static Tube <b>DCW1400795</b></p>	
	<p><b>EZ Panel Mount Pressure Sensor</b></p> <ul style="list-style-type: none"> <li>• Standard and Low Range Models</li> <li>• Optional 6" (150mm) Static Tube Included</li> <li>• Field Selectable Outputs and Ranges</li> </ul>
<p>Standard WC Ranges, -5 to +5" WC, Included 6" (150mm) Static Tube <b>DCW1400392</b></p>	
<p>Standard Pascal Ranges, -1,250 to +1,250 Pa, Included 6" (150mm) Static Tube <b>DCW1400184</b></p>	
<p>Standard WC Ranges, -5 to +5" WC, No Included Static Tube <b>DCW1400398</b></p>	
<p>Standard Pascal Ranges, -1,250 to +1,250 Pa, No Included Static Tube <b>DCW1401311</b></p>	
<p>Low WC Ranges, -1 to +1" WC, No Included Static Tube <b>DCW1400399</b></p>	
<p>Low Pascal Ranges, -250 to +250 Pa, Included 6" (150mm) Static Tube <b>DCW1400485</b></p>	
<p>Low Pascal Ranges, -250 to +250 Pa, No Included Static Tube <b>DCW1401306</b></p>	

# DIFFERENTIAL AIR PRESSURE SWITCHES





**Delta**  
CONTROLS  
A Delta Group Company

	<b>Pressure Switch with a BAPI-Box Enclosure</b> <ul style="list-style-type: none"> <li>• Seven Pressure Ranges are Field Configurable from 0.12" to 35.32" WC (30 to 8,800 Pa)</li> <li>• Factory Configured Field Adjustable Setpoint</li> <li>• Polycarbonate BAPI-Box Enclosure (IP66, NEMA 4)</li> </ul>	
	Unit with Adjustable Setpoint from 0.12" to 0.52" W.C. (30 to 130 Pa)	<b>DCW1400454</b>
	Unit with Adjustable Setpoint from 0.40" to 1.40" WC (100 to 350 Pa)	<b>DCW1400115</b>
	<b>Adjustable Pressure Switch</b> <ul style="list-style-type: none"> <li>• Adjustable Setpoint from 0.08" to 1.2" WC / 20 to 300 Pascal</li> <li>• Monitoring Overpressure, Vacuum and Differential Pressure of Air or Other Non-Combustible, Non-Aggressive Gases</li> </ul>	
	Unit with Adjustable Setpoint from 0.08" to 1.2" WC / 20 to 300 Pascal	<b>DCW1400644</b>

# PICKUP PORTS & PRESSURE TUBES







	<b>Stainless Steel Wall Plate Pickup Port</b> <ul style="list-style-type: none"> <li>• Includes 80 Micron Filter</li> </ul>	
	Wall Plate Pickup Port	<b>DCW1400084</b>
	<b>Galvanized Steel Ceiling Tile Pickup Port</b> <ul style="list-style-type: none"> <li>• Includes 80 Micron Filter</li> <li>• Fits Standard Ceiling Tile</li> </ul>	
	Ceiling Tile Pickup Port	<b>DCW1400325</b>
 Horizontal      Vertical	<b>Outside Air Pressure Pickup Port, Horizontal or Vertical Mount</b> <ul style="list-style-type: none"> <li>• Metal and UV-Resistant Plastic Enclosure</li> <li>• Helps Stabilize Readings by Reducing Fluctuations from Wind Gust</li> </ul>	
	Outside Air Pickup Port, Horizontal Mount	<b>DCW1400083</b>
	Outside Air Pickup Port, Vertical Mount	<b>DCW1400385</b>

# PICKUP PORTS & PRESSURE TUBES




**Delta**  
CONTROLS  
A Delta Group Company

	<b>Low Profile Room Pressure Pickup Port</b> <ul style="list-style-type: none"> <li>• Paintable with Latex or Oil Base</li> <li>• Five Micron Filter and Built in Surge Damper</li> </ul>	
	Low Profile Pickup Port	<b>DCW1400429</b>
	<b>6" (150mm) Static Pressure Probe Assembly</b> <ul style="list-style-type: none"> <li>• 6" (150mm) Aluminum Static Tube</li> <li>• Includes Foam Pad, Rubber Tubing with Surge Damper, Sheet Metal Screws and Bulkhead Fitting</li> </ul>	
	6" (150mm) Static Pressure Probe Assembly	<b>DCW1400328</b>
	<b>6" (150mm) Static Pressure Probe</b> <ul style="list-style-type: none"> <li>• 6" (150mm) Aluminum Static Tube</li> </ul>	
	6" (150mm) Static Pressure Probe	<b>DCW1400333</b>
	<b>Surge Damper with 5 Micron Filter</b> <ul style="list-style-type: none"> <li>• Fits Standard Rubber Tubing</li> </ul>	
	Surge Damper with 5 Micron Filter	<b>DCW1400430</b>



# CARBON DIOXIDE (CO<sub>2</sub>) SENSORS



	<b>CO<sub>2</sub> Duct Sensor in a BAPI-Box</b> <ul style="list-style-type: none"> <li>• Dual Channel for Continuously Occupied Areas</li> <li>• 0 to 2,000 PPM Range</li> <li>• Polycarbonate BAPI-Box Enclosure (IP66, NEMA 4X) with LED Level Indication</li> </ul>	
	Dual Channel CO <sub>2</sub> Sensor for Continuously Occupied Areas, 0 to 5 VDC Output	<b>DCW1401608</b>
	Dual Channel CO <sub>2</sub> Sensor for Continuously Occupied Areas, 0 to 10 VDC Output	<b>DCW1400697</b>


# VOLATILE ORGANIC COMPOUND (VOC) SENSORS



	<b>VOC Duct Sensor in a BAPI-Box</b> <ul style="list-style-type: none"> <li>• 0 to 2,000 PPM CO<sub>2</sub> Equivalent Output Range</li> <li>• 0 to 5 or 0 to 10 VDC Output</li> <li>• Polycarbonate BAPI-Box Enclosure (IP66, NEMA 4X) with LED Level Indication</li> </ul>	
	VOC Duct Sensor with 0 to 5 VDC Output	<b>DCW1400896</b>
	VOC Duct Sensor with 0 to 10 VDC Output	<b>DCW1402237</b>
	<b>Total VOC (TVOC) Sensor in a BAPI-Stat "Quantum" Enclosure</b> <ul style="list-style-type: none"> <li>• 0 to 2,500 ppb Total VOC (TVOC) Range</li> <li>• Field Selectable 0 to 5 or 0 to 10 VDC Output</li> </ul>	
	Total VOC (TVOC) Sensor in a BAPI-Stat "Quantum" Enclosure	<b>DCW1400797</b>


# CARBON MONOXIDE (CO) SENSORS



	<b>CO Rough Service Sensor with Optional BACnet</b> <ul style="list-style-type: none"> <li>• Ventilated BAPI-Box Polycarbonate Enclosure for Rough Service Areas</li> <li>• 0 to 500 ppm CO range with field selectable outputs of 0 to 5, 1 to 5, 0 to 10 and 2 to 10 VDC.</li> <li>• Optional BACnet MS/TP Output</li> </ul>	
	Carbon Monoxide (CO) Rough Service Sensor with Voltage Output	<b>DCW1402341</b>
	Carbon Monoxide (CO) Rough Service Sensor with BACnet MS/TP Output	<b>DCW1402074</b>

# PARTICULATE MATTER (PM) SENSORS



	<b>Particulate Matter (PM) Sensor in a BAPI-Stat "Quantum" Enclosure</b> <ul style="list-style-type: none"> <li>• Field Selectable Particulate Size of PM1.0, PM2.5 and PM10</li> <li>• Field Selectable Outputs of 0 to 5V, 0 to 10V and 4 to 20mA</li> </ul>	
	Particulate Matter (PM) Sensor in a BAPI-Stat "Quantum" Enclosure	<b>DCW1400796</b>

# ACCESSORIES FOR HVAC/R



	<b>Water Leak Detector - Spot Sensor with BAPI-Box Enclosure</b> <ul style="list-style-type: none"> <li>• Built-In Probe Sensor</li> <li>• Two 5 Amp Relays (SPDT)</li> <li>• Polycarbonate BAPI-Box Enclosure (IP66, NEMA 4)</li> </ul>	
	Unit with Two 5A Relays (SPDT)	<b>DCW1400990</b>
	<b>Water Leak Detector - Remote Spot Sensor with BAPI-Box Enclosure</b> <ul style="list-style-type: none"> <li>• Remote Sensor with 5' or 10' (1.5m or 3m) Cable Length</li> <li>• Two 5 Amp Relays (SPDT)</li> <li>• Polycarbonate BAPI-Box Enclosure (IP66, NEMA 4)</li> </ul>	
	Unit with Remote Spot Sensor, 5' (1.5m) Cable and Two 5A Relays (SPDT)	<b>DCW1400996</b>
	Unit with Remote Spot Sensor, 10' (3m) Cable and Two 5A Relays (SPDT)	<b>DCW1400972</b>
	<b>Water Leak Detector - Remote Rope Sensor with BAPI-Box Enclosure</b> <ul style="list-style-type: none"> <li>• Remote Rope Sensor, Detects Water Along the Entire Length</li> <li>• Two 5 Amp Relays (SPDT)</li> <li>• Polycarbonate BAPI-Box Enclosure (IP66, NEMA 4)</li> </ul>	
	Unit with 10' (3m) Remote Rope Two 5A Relays (SPDT)	<b>DCW1400988</b>
	Unit with 25' (7.6m) Remote Rope Two 5A Relays (SPDT)	<b>DCW1400989</b>
	Unit with 50' (15m) Remote Rope Two 5A Relays (SPDT)	<b>DCW1400981</b>
	<b>Voltage Converter (350mA) in an EZ Enclosure</b> <ul style="list-style-type: none"> <li>• Adjustable Output of 5 to 24 VDC</li> <li>• DIN Rail, Snaptrack or Surface Mount</li> <li>• Self-Resetting Thermal Fuse</li> </ul>	
	Voltage Converter (350mA)	<b>DCW1400488</b>
	<b>Voltage Converter (350mA) in a Plastic Shell</b> <ul style="list-style-type: none"> <li>• Adjustable Output of 5 to 24 VDC</li> <li>• Optional 1.25" (32mm) Length of Snaptrack</li> <li>• Self-Resetting Thermal Fuse</li> </ul>	
	Shown w/ optional snaptrack	
	Voltage Converter (350mA) with Included Snaptrack	<b>DCW1400450</b>



	<p><b>Thermostat Guard</b></p> <ul style="list-style-type: none"> <li>• Prevents Tampering, Damage and Unauthorized Adjustment</li> <li>• Exceptional Airflow</li> <li>• Two Sizes to Fit Most Room Units</li> </ul>	DCW1400603
	Smaller Thermostat Guard for Sensors Up to 4.9 x 3.5" (126 x 90mm)	
	Larger Thermostat Guard for Sensors Up to 6.8 x 4.65" (175 x 118mm)	DCW1400602
	<p><b>Adaptor Plates for Retrofits - Four Color Options</b></p> <ul style="list-style-type: none"> <li>• ABS Flame-Retardant Plastic</li> <li>• Covers Wall Imperfections When Replacing Wall Sensors or Thermostats</li> <li>• 5.25 x 7" (133 x 178mm) size</li> </ul>	
	5.25 x 7" (133 x 178mm) - Bright White	DCW1402063
	5.25 x 7" (133 x 178mm) - Warm White	DCW1400023
	5.25 x 7" (133 x 178mm) - Copla White	DCW1400515
	5.25 x 7" (133 x 178mm) - Off White	DCW1400098
	<p><b>Spanner Bit for Spanner Security Screws</b></p> <ul style="list-style-type: none"> <li>• Spanner Security Screws Add an Extra Level of Protection for Wall Plate Units</li> </ul>	
	Spanner Bit for Spanner Security Screws	DCW1400069
	<p><b>Foamback Insulators, 0.25" (6mm) Thickness</b></p> <ul style="list-style-type: none"> <li>• Ensures that Room Sensors are Reading the Temperature of the Room, not the Wall</li> <li>• Insulates Remote Probes When Using the Probe Against a Small Pipe</li> <li>• Measures 2.6 x 4.4" (66 x 112mm)</li> </ul>	
	Foamback Insulator, 0.25" (6mm) Thickness - Pack of 100	DCW1400060
	<p><b>Screwdriver and Allen Wrench Combination</b></p> <ul style="list-style-type: none"> <li>• For Terminal Block Screws and Cover Locking Screws on Room Sensors</li> <li>• 6" (152mm) Model for Short-Term Use, and 6.75" (171mm) Model for Prolonged Use</li> </ul>	
<p>6.75" Model on Top 6" Model on Bottom</p>	6.75" (171mm) Combination for Prolonged Use	DCW1400157
	6" (152mm) Combination for Short-Term Use	DCW1400159
	<p><b>Flexible Probe Bracket, Averaging Sensor Mounting Bracket</b></p> <ul style="list-style-type: none"> <li>• For Quick and Easy Mounting of Averaging Probes</li> <li>• Scored Break-off for 1/4" (6mm) Rigid Probe Mounting</li> </ul>	
	Flexible Probe Bracket - Pack of 50	DCW1400405



**A Delta Group Company**

**DELTA CONTROLS**

17850 56 Ave, Surrey BC,  
CANADA V3S 1C7  
604.574.9444

[www.deltacontrols.com](http://www.deltacontrols.com)

Online ordering: <https://orders.deltacontrols.com/>