



10K-2 Thermistor Output Table

°F °C Ohms			°F °C Ohms			°F °C Ohms		
-39	-39.44	323839	37	2.78	28365	113	45.00	4367
-37	-38.33	300974	39	3.89	26834	115	46.11	4182
-35	-37.22	279880	41	5.00	25395	117	47.22	4006
-33	-36.11	260410	43	6.11	24042	119	48.33	3838
-31	-35.00	242427	45	7.22	22770	121	49.44	3679
-29	-33.89	225809	47	8.33	21573	123	50.56	3525
-27	-32.78	210443	49	9.44	20446	125	51.67	3380
-25	-31.67	196227	51	10.56	19376	127	52.78	3242
-23	-30.56	183068	53	11.67	18378	129	53.89	3111
-21	-29.44	170775	55	12.78	17437	131	55.00	2985
-19	-28.33	159488	57	13.89	16550	133	56.11	2865
-17	-27.22	149024	59	15.00	15714	135	57.22	2751
-15	-26.11	139316	61	16.11	14925	137	58.33	2642
-13	-25.00	130306	63	17.22	14180	139	59.44	2538
-11	-23.89	121939	65	18.33	13478	141	60.56	2438
-9	-22.78	114165	67	19.44	12814	143	61.67	2343
-7	-21.67	106939	69	20.56	12182	145	62.78	2252
-5	-20.56	100218	71	21.67	11590	147	63.89	2165
-3	-19.44	93909	73	22.78	11030	149	65.00	2082
-1	-18.33	88090	75	23.89	10501	151	66.11	2003
1	-17.22	82670	77	25.00	10000	153	67.22	1927
3	-16.11	77620	79	26.11	9526	155	68.33	1855
5	-15.00	72911	81	27.22	9078	157	69.44	1785
7	-13.89	68518	83	28.33	8653	159	70.56	1718
9	-12.78	64419	85	29.44	8251	161	71.67	1655
11	-11.67	60592	87	30.56	7866	163	72.78	1594
13	-10.56	57017	89	31.67	7505	165	73.89	1536
15	-9.44	53647	91	32.78	7163	167	75.00	1480
17	-8.33	50526	93	33.89	6838	169	76.11	1427
19	-7.22	47606	95	35.00	6530	171	77.22	1375
21	-6.11	44874	97	36.11	6238	173	78.33	1326
23	-5.00	42317	99	37.22	5960	175	79.44	1279
25	-3.89	39921	101	38.33	5697	177	80.56	1234
27	-2.78	37676	103	39.44	5447	179	81.67	1190
29	-1.67	35573	105	40.56	5207	181	82.78	1149
31	-0.56	33599	107	41.67	4981	183	83.89	1109
33	0.56	31732	109	42.78	4766	185	85.00	1070
35	1.67	29996	111	43.89	4561	187	86.11	1034

* All Passive Thermistors 10K Ω and smaller are CE compliant.




Thermistor Description

BAPI Thermistors are thermally sensitive resistors known for exhibiting a large change in resistance with only a small change in temperature. It is important to note that a thermistor's change in resistance is non-linear. It follows a pre-defined curve which is provided by the thermistor manufacturer. An example of a thermistor output curve can be seen in **Figure 1**.

Thermistors are manufactured to follow a specific curve with a high degree of accuracy. All BAPI thermistors have a standard accuracy of $\pm 0.2\text{ }^\circ\text{C}$ throughout the commercial temperature range of 0 to 70 $^\circ\text{C}$. BAPI also has available a higher accuracy sensor for meeting tougher specs. The extra precision [XP] line has an initial accuracy of $\pm 0.1\text{ }^\circ\text{C}$ throughout the commercial temperature range of 0 to 70 $^\circ\text{C}$. Please call for availability and pricing on [XP] line thermistors. Both accuracy levels allow BAPI thermistors to be interchanged without the extra expense of offsetting the controller.

* All Passive Thermistors 10K Ω and smaller are CE compliant.

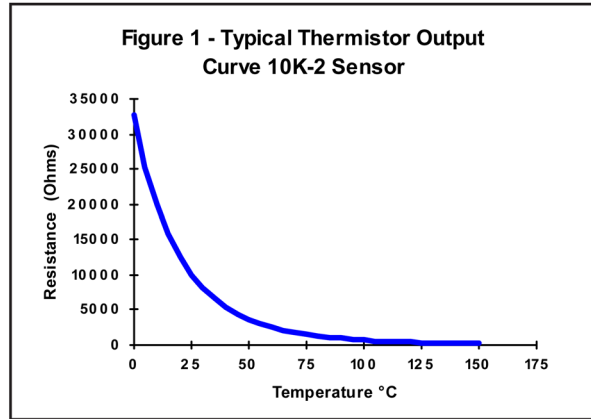

Thermistor Specifications

DEFINITION OF SPECIFICATION TERMS

Interchangeability Tolerance (Accuracy):
The maximum amount that thermistors following the same curve will differ from each other.

Dissipation Constant:
The power needed to raise the thermistor's body temperature by 1 $^\circ\text{C}$. At the heart of all BAPI thermistor products is a sensor with a 2.7 mW/ $^\circ\text{C}$ dissipation constant to ensure that self-heating stays at an absolute minimum.

Stability (drift):
The amount that the resistance characteristics of a thermistor will change. BAPI uses only the highest quality, "pre-aged" thermistors with very small drift values. Over a ten year span, BAPI thermistors will not change more than 0.1 $^\circ\text{C}$.

Operating Range:
The operating range shown is for the thermistor only. The mounting package may further limit the operating range and is described on each mounting type specification. The thermal time constant will also be affected based on the added mass of the stainless steel probe and moisture protection encapsulation.

Thermal Time Constant
Bare sensors are typically measured and specified in still air and are timed at the statistical 63.2% of the step temperature change. A stirred liquid test will typically result in a much faster response time and is also timed at 63.2% of the step temperature change. The time constant is always the same whatever the temperature step change may be.

Thermistor Specifications

Interchangeability Tolerance (Accuracy):
Standard Sensor: $\pm 0.2\text{ }^\circ\text{C}$ (0 to 70 $^\circ\text{C}$)
High Accuracy [XP] Sensor: $\pm 0.1\text{ }^\circ\text{C}$ (0 to 70 $^\circ\text{C}$)

Dissipation Constant: 2.7 mW/ $^\circ\text{C}$

Stability (drift): Less than 0.02 $^\circ\text{C}$ / year

Thermal Time Constant: 5 seconds (bead in still air)
.5 seconds (stirred liquid)

Sensor Type	Reference Resistance	Operating Range
1.8K	1.8 K Ω @ 25 $^\circ\text{C}$	-55 to 150 $^\circ\text{C}$
2.2K	2.2 K Ω @ 25 $^\circ\text{C}$	-55 to 150 $^\circ\text{C}$
3K**	3 K Ω @ 25 $^\circ\text{C}$	-55 to 150 $^\circ\text{C}$
3.3K	3.3 K Ω @ 25 $^\circ\text{C}$	-55 to 150 $^\circ\text{C}$
10K-2**	10 K Ω @ 25 $^\circ\text{C}$	-55 to 150 $^\circ\text{C}$
10K-3**	10 K Ω @ 25 $^\circ\text{C}$	-55 to 150 $^\circ\text{C}$
10K-3(11K)**	5.2 K Ω @ 25 $^\circ\text{C}$	-55 to 150 $^\circ\text{C}$
10K-4	10 K Ω @ 25 $^\circ\text{C}$	-55 to 150 $^\circ\text{C}$
20K**	20 K Ω @ 25 $^\circ\text{C}$	-55 to 150 $^\circ\text{C}$
47K	47 K Ω @ 25 $^\circ\text{C}$	-55 to 150 $^\circ\text{C}$
50K	50 K Ω @ 25 $^\circ\text{C}$	-80 to 150 $^\circ\text{C}$
100K**	100 K Ω @ 25 $^\circ\text{C}$	-55 to 150 $^\circ\text{C}$

Other Thermistors are available. Contact BAPI for availability and specifications of additional thermistors.

**Available as an [XP] high accuracy sensor. Minimum quantities and long lead times may apply. 10K-2[XP] and 10K-3[XP] thermistors are typically stocked items