




Features & Options

BA/LI14505

The BA/LI14505 Lithium AA battery is the ideal replacement for all BAPI Bluetooth Low Energy wireless sensors (except the Wireless Food Probe). Each unit takes two batteries, except the BAPI-Stat “Quantum Slim” which takes only one battery.

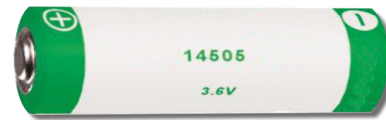

BA/LI14505
(for all BAPI Wireless Sensors except the Wireless Food Probe)

BA/BAT-5AA-HIT

The BA/BAT-5AA-HIT High Temperature Lithium ½AA battery is the ideal replacement for the BAPI Bluetooth Low Energy Wireless Food Probe sensor. Each food probe takes one battery.



BA/BAT-5AA-HIT
(for Wireless Food Probe)

<u>PART NUMBER</u>	<u>DESCRIPTION</u>
--------------------	--------------------

BA/LI14505	Lithium AA Battery, 3.6V, for all BAPI Bluetooth Low Energy Wireless sensors except the Wireless Food Probe
-------------------------	---

BA/BAT-5AA-HIT	Lithium ½AA Battery, 3.6V, for the BAPI Bluetooth Low Energy Wireless Food Probe
-----------------------------	--

Specifications

BA/LI14505 Battery

Type & Size: Lithium, AA

Nominal Voltage: 3.6V

Nominal Capacity: 2.6 Ah @1mA, to 2V

Operation Temp:

-67 to 185°F (-55 to 85°C)

0 to 95 %RH Non-Condensing

Agency: RoHS

BA/BAT-5AA-HIT Battery

Type & Size: Lithium (High Temp), ½AA

Nominal Voltage: 3.6V

Nominal Capacity: 0.9 Ah @ 1mA, to 2V

Operating Temp:

-67 to 257°F (-55 to 125°C)

0 to 95 %RH Non-Condensing


Agency: RoHS

Pluggable Terminal Blocks Kit



Features & Options

BAPI Wireless Output Modules plug into each other and the receiver. However, the modules may also be mounted remotely using the optional Pluggable Terminal Block Connectors which are available as a 4-connector kit.

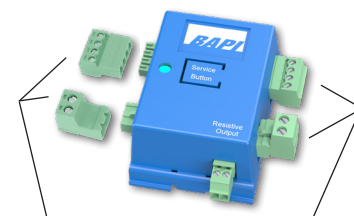

Optional Pluggable Terminal Block Kit (4 Connectors)

PART NUMBER:

BA/AOM-CONN ..Pluggable Terminal Block Kit

